
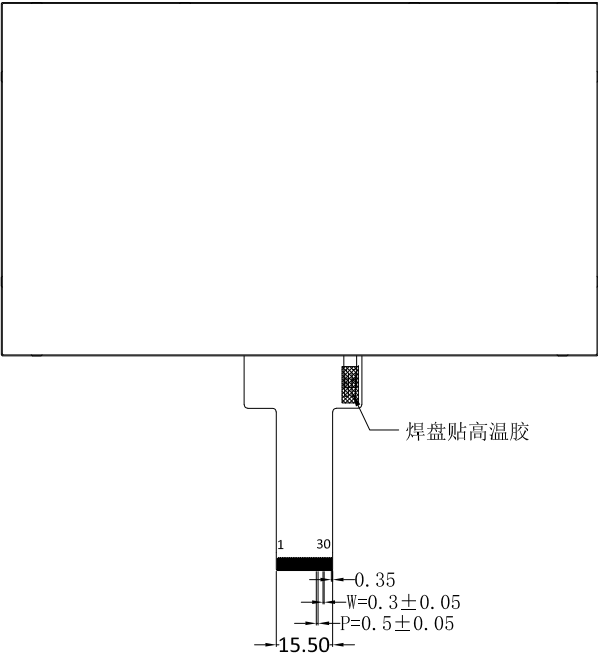
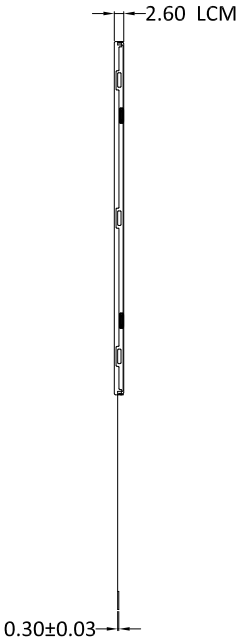



Version	1. 0	2025-03-20	New Issue						

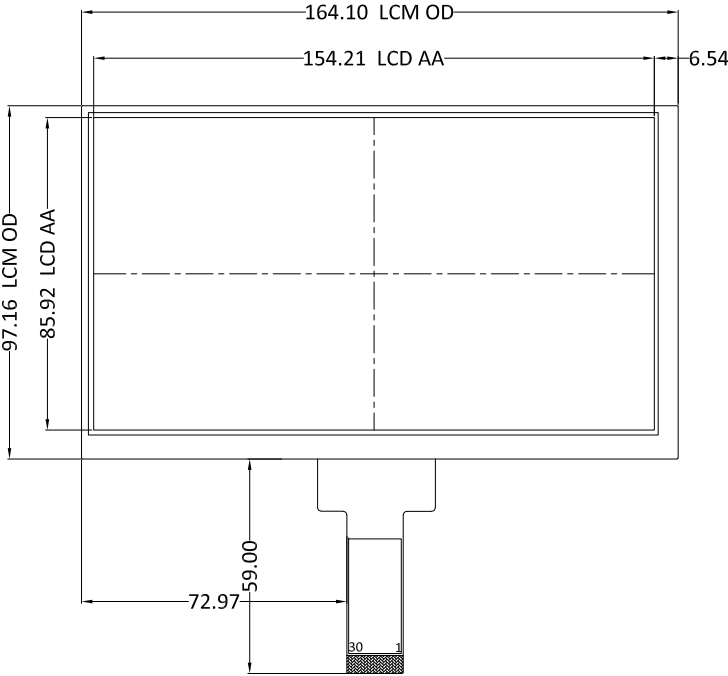


No	PIN NAME
1	LED+
2	LED+
3	LCD_VGH
4	LCD_VGL
5	UPDN
6	SHLR
7	LED-
8	LED-
9	AVDD
10	GND
11	MIPI_TDP3
12	MIPI_TDN3
13	GND
14	MIPI_TDP2
15	MIPI_TDN2
16	GND
17	MIPI_TCP
18	MIPI_TCN
19	GND
20	MIPI_TDP1
21	MIPI_TDN1
22	GND
23	MIPI_TDP0
24	MIPI_TDN0
25	GND
26	STBYB
27	RSTB
28	VDD
29	VDD
30	VCOM

SPECIFICATIONS:

1. DISPLAY TYPE:
- 7.0"/ IPS / 1024*600
2. DRIVE IC:
- EK79007AD3
3. OPERATING TEMPERATURE:
- 20 ~ 60°C
4. STORAGE TEMPERATURE:
- 30 ~ 70°C
5. VIEWING ANGLE:
- IPS
6. BACKLIGHT:
- WHITE LED, VF=9V,IF=180mA
7. BRIGHTNESS:
- 500 CD/M2 (TYP)
8. CUSTOMER PART NO.:
- BOCEN STANDARD PRODUCT



BOCEN DISPLAY TECHNOLOGY CO., LTD.		
DESIGNED BY: Sylar	BF7030-09	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: http://www.bocentech.com		DATE: 2025-03-20